


HIGHLIGHTS


- RoHS Directive 2002/95/EC compliant
- NEMA TS2 Certified
- No serial cable distance limitations enables communication between a host PC and serial devices located anywhere across an Ethernet network
- Software selectable RS-232/422/485 serial interfaces
- Supports native COM, TTY, or TCP/IP Socket communication modes
- Web-based configuration makes setup and management changes quick and easy
- Real-time e-mail event notification alerts administrator of potential connection and security issues
- Wide -37° to 74°C industrial temperature range
- Rugged stainless steel housing enables DIN rail or panel-mounting
- PortVision® enterprise monitoring and management software automatically monitors devices on the network and enables user to view status, update firmware and resolve issues remotely



Part Number
99448-0

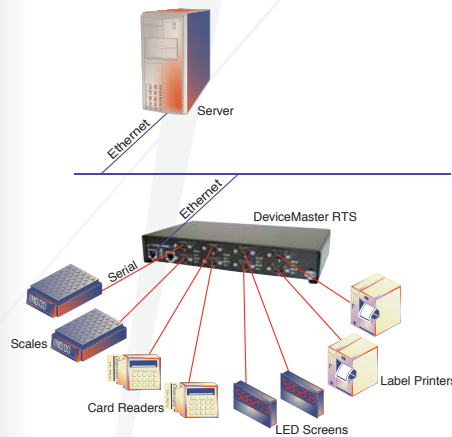

Ethernet-Enabled Serial Devices
using NS-Link COM/TTY Driver

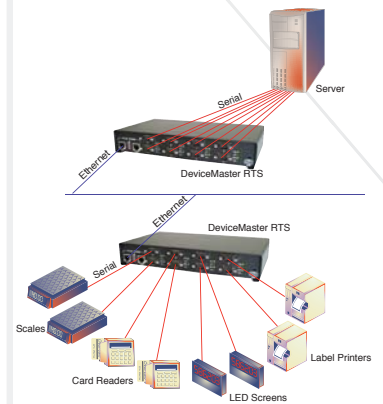

DeviceMaster Serial Tunneling using
TCP Socket Communications

DeviceMaster® RTS 8-Port DB9



The Control DeviceMaster RTS 8-Port DB9 is an eight-port device server designed for network-enabling serial communications devices. When used with the included NS-Link™ driver software and a host PC, the DeviceMaster RTS enables placement of COM or TTY ports anywhere on an Ethernet network or across the Internet. In applications

where connecting legacy serial devices to a PC without software changes is a requirement, a pair of DeviceMaster RTS units can be used to create a point-to-point serial tunnel across the network that seamlessly transfers serial data via TCP or UDP socket connections.



SPECIFICATIONS

HARDWARE

Processor	ARM7 44Mhz
8MB RAM	
4MB Flash (Programmable)	
(2) 10/100 Base-T Ethernet	
Black Finished Steel Enclosure	
Product Weight	77.1 oz
Panel/Rack Mountable	
LED Indicators	
Status	
Ethernet Link/Activity	
Collision	
100MB Ethernet	
RX/TX Per Port	
Surge Protection	15KV

ELECTRICAL SPECIFICATIONS

Device Requirements	9 to 30 VDC
Device Consumption	6.96 Watts
External Power Supply	(Included)
Input	90 to 260 VAC @60Hz
Output	290mA @ 24 VDC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature*	-37 to 74°C
Storage Temperature	-40 to 85°C
Operating Humidity	5% to 95%
Altitude	0 to 10,000 Ft
Heat Output	23.8 BTU/Hr
MTBF	21.5 Years

DEVICE DRIVERS

Microsoft Windows NT®, Microsoft Windows 2000®, Microsoft Windows Server 2003®, Microsoft Windows XP®, Microsoft 7, Microsoft 2008 Server
Linux
BootLoader 2.04
Socketserver 3.18

SERIAL COMMUNICATIONS

Software-Selectable	RS-232/422/485
Baud Rates	50 to 230 Kbps
Serial Connectors	(8) DB9
Data Bits	7 or 8
Parity	Odd, Even, None
Stop Bits	1 or 2

FEATURES

Lowest Latency
NS-Link COM/TTY Port Redirector
PortVision Remote Management
TCP/IP & UDP Socket Services
Real-Time Clock
Telnet
HTTP
SNMP
DHCP / RARP / ARP / BOOTP / Ping
Hardware & Software Flow Control
Watchdog Reset
Event Notification
RFC 1006

REGULATORY APPROVAL MARKS


CE Mark, FCC Part 15 Subpart B Class A, C-Tick, UL, CUL, RoHS 2002/95/EC

REGULATORY STANDARDS

Immunity: EN55024 EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, IEC 1000-4-2, IEC 1000-4-3, IEC 1000-4-4, IEC 1000-4-5, IEC 1000-4-6, IEC 1000-4-8, IEC 1000-4-11
Emission: EN55022 & A1:2000 IEC 1000-3-2, IEC 1000-3-3, CISPR-22, ICES-003
Safety: EN60950, IEC 60950, CSA C22.2 No.50/UL60950
NEMA TS2 Compliant



RTS PIN ASSIGNMENTS

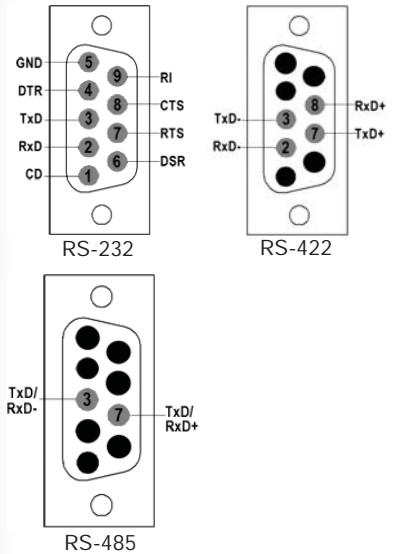

ORDERING INFORMATION

99448-0 DeviceMaster RTS 8-Port DB9

PRODUCT SUPPORT & SERVICE INFORMATION

Warranty Information

Control offers a 30-day satisfaction guarantee and 5-year limited warranty.

Sales Support

+1.763.494.4100
sales@control.com

Technical Support

+1.763.494.4100
www.control.com/support

Email, FTP, and Web Support

info@control.com
ftp.control.com
www.control.com

*We have tested the products to run at these temperatures.